




Digital Receipt

This receipt acknowledges that Turnitin received your paper. Below you will find the receipt information regarding your submission.

The first page of your submissions is displayed below.

Submission author: I Made Wicaksana Ekaputra
Assignment title: Periksa similarity
Submission title: Tensile behavior of austenitic stainless steel 316LN at high t...
File name: ainless_steel_316LN_at_high_temperatures_a_preliminary_st...
File size: 1.19M
Page count: 9
Word count: 2,393
Character count: 11,196
Submission date: 31-Jan-2023 09:47AM (UTC+0700)
Submission ID: 2002998204

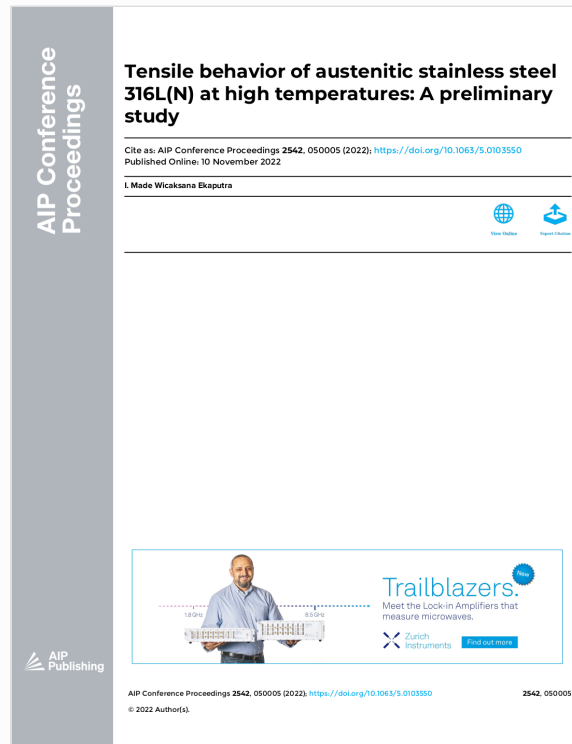

Tensile behavior of austenitic stainless steel 316LN at high temperatures a preliminary study

by Ekaputra I Made Wicaksana

Submission date: 31-Jan-2023 09:47AM (UTC+0700)

Submission ID: 2002998204

File name: ainless_steel_316LN_at_high_temperatures_a_preliminary_study.pdf (1.19M)

Word count: 2393

Character count: 11196

Tensile behavior of austenitic stainless steel 316L(N) at high temperatures: A preliminary study

Cite as: AIP Conference Proceedings **2542**, 050005 (2022); <https://doi.org/10.1063/5.0103550>
Published Online: 10 November 2022


I. Made Wicaksana Ekaputra



View Online



Export Citation

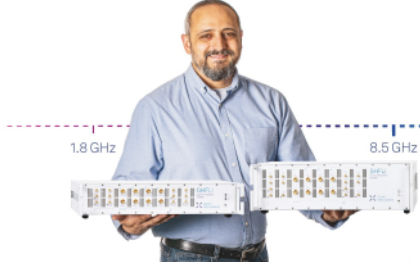

Trailblazers.

Meet the Lock-in Amplifiers that measure microwaves.

Zurich Instruments

Find out more

Tensile Behavior of Austenitic Stainless Steel 316L(N) at High Temperatures: A Preliminary Study

I Made Wicaksana Ekaputra^{a)}

6

Universitas Sanata Dharma, Paingan, Maguwoharjo, Depok, Sleman, Yogyakarta 55282, Indonesia

^{a)}Corresponding author: made@usd.ac.id

Abstract. Austenitic stainless steel 316 L(N) behaviour due to tension load at elevated temperatures must be considered since the abnormal strain hardening may not be predicted. The abnormal strain hardening at the plastic region may appear with various type of serrated yielding. In this study, the austenitic stainless steel 316 L(N) was investigated under tension load for various temperature with the range of 24 °C–655 °C at 10⁻⁵/s of deformation rate. The specimens are cylindrical, following the ASTM standard. During the test, the thermocouple was attached to the surface of the specimen. In this preliminary study, the results were to obtain the area of serrated yielding that occurred from the ultimate tensile strength, yield strength, and constant material values of flow relationship.

INTRODUCTION

The austenitic stainless steel 316L(N) or 316 L(N) SS has been investigated comprehensively for application in a high-temperature environment [1–3]. This alloy is still an option for the component in the power plant due to its beneficial features such as good resistance to high-temperature environment, suitable with particular coolant, and appropriate weldability. Since this steel is applied in a harsh environment, several laboratory examinations for high-temperature testing are still being investigated. The basic properties of the tensile test at high-temperature condition must be obtained before further testing.

It has been reported that a particular temperature and deformation rate conditions, [12] phenomenon of serrated yielding occurred due to tension load. The serrated yielding phenomenon, also known as dynamic strain ageing (DSA) or Portevin-Le Chatelier (PLC) effect, was related to the hardening process where mobile dislocation associates with the diffusing solute atom [4–6]. The serrated yielding region may be indicated by the curve trend of ultimate and yield strength, work-hardening parameters, and ductility [6]. The curve trend of the serrated yielding region can be manifested as presented in Fig. 1. The serrated yielding region for several alloys was found in the plastic region at an intermediate temperature [4].

In this study, the 316 L(N) SS was investigated under various temperature conditions at 10⁻⁵/s of deformation rate. The occurrence of serrated yielding was determined based on the plateau occurrence on the ultimate tensile strength, yield strength, and parameters curves of flow relationships. Finally, the serrated yielding area for the 316 L(N) SS at 10⁻⁵/s of deformation rate can be determined from these preliminary results.

EXPERIMENTAL PROCEDURE

8

The tensile test specimen had a cylindrical form with a diameter of 6 mm and a gauge length of 30 mm. All specimens were manufactured in the rolling direction, as shown in Fig. 2. For the final preparation, the specimens were polished along the surface with #2000-grit sandpaper. All of the specimen preparations followed the ASTM E8 [7].

2

The 4th International Conference on Science and Science Education (ICoNSE 2021)

AIP Conf. Proc. 2542, 050005-1–050005-8; <https://doi.org/10.1063/5.0103550>

Published by AIP Publishing. 978-0-7354-4259-7/\$30.00

050005-1

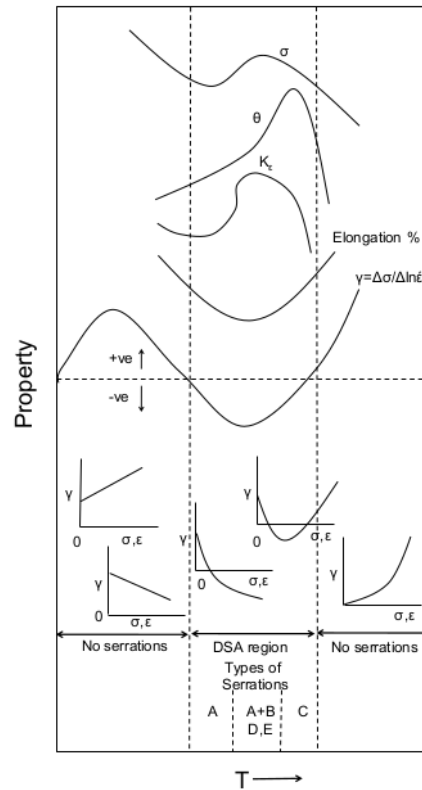


FIGURE 1. Several manifestation to determine the serrated yielding region [6].

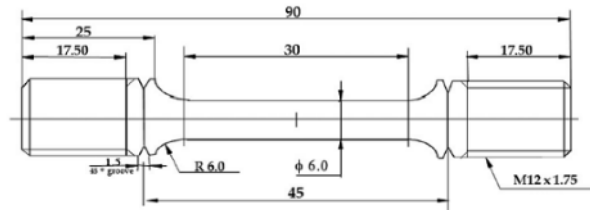


FIGURE 2. Cylindrical specimen for tensile test

16

The tension test was conducted at various temperatures ranging from 24 °C to 655 °C and a deformation rate of 10^{-5} /s. The tension test followed the ASTM E21 [8] for the tensile test at high temperature. The tensile test was conducted using a universal testing machine with a capacity of 50 kN. The test was controlled via a data acquisition card embedded in the PC and connected to the test machine. The deformation rate was entered in the control programme in PC with the value of 10^{-5} /s. The cylindrical specimen was put at the centre of the furnace in line with the load direction. The thermocouple was attached to the specimen surface with the temperature control range within ± 3 °C. The elongation was measured from the displacement of the crosshead movement of the machine. After conducting the test, the tensile data were evaluated and discussed.

RESULTS AND DISCUSSION

A typical curve of engineering stress-strain for 316 L(N) SS was shown in Fig. 3. It can be seen that under a particular temperature, the serrated yielding appears very clearly. It is seen that serrated yielding started at 510 °C to 655 °C. However, the serrated yielding regions must be determined carefully from several manifestations, as explained in Fig. 1. It is also seen that all of the curves shows the strain hardening process for all temperatures. For particular alloy, it has been reported that the softening process could have occurred at high temperature [4]. In this preliminary discussion, the serrated yielding will be determined based on the ultimate tensile strength (UTS) and yield strength (YS) curve. In addition, the serrated yielding region will also be determined from the parameter value curve of flow relationships.

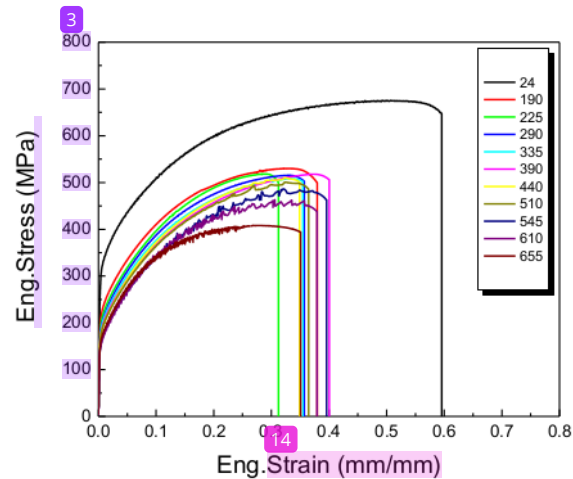


FIGURE 3. Engineering stress-strain curve for 316 L(N) SS

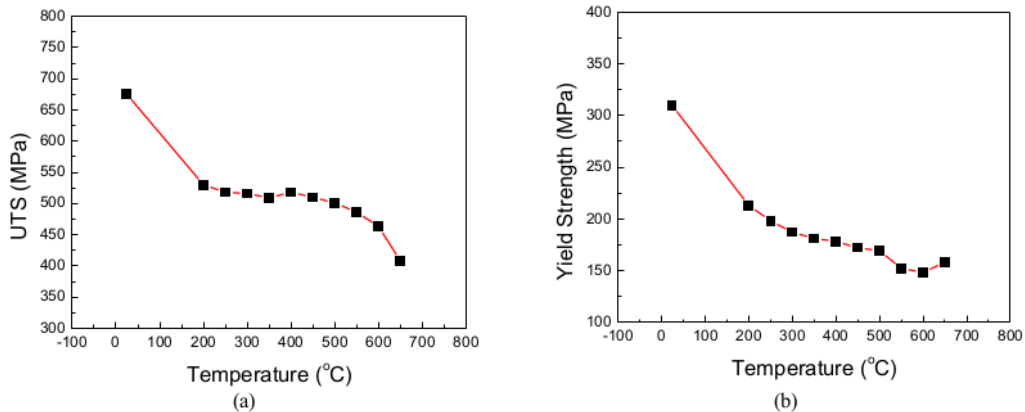


FIGURE 4. Tensile properties of 316 L(N) SS (a) ultimate tensile strength; (b) yield strength

Based on the engineering stress-strain curve, the UTS and YS curves are presented in Fig. 4. Both UTS and YS almost show a similar curve trend, where the values are decreased with an increase in temperature. The recovery occurrence can simply explain it at a higher temperature. A significant decrease starts at 190 °C and a bit of drop to 655 °C. A gradual decrease makes the curve plateau alike. It has been reported that plateau alike indicated the serrated yielding occurrence [4]. It is also suitable with the curve trend shown in Fig. 1.

Another serrated yielding region is determined from the trend of flow relationship constant values. The constant material values are obtained by applying suitable flow relationship from five flow relationships; Ludwigs, Hollomon, Ludwik, Swift, and Voce. It has been reported that these five flow relationship had described the serrated yielding region very satisfactorily [4].

Fig. 5 shows a typical true stress-strain curve in a double-logarithmic scale for 316 L(N) SS. All curves are at the plastic region after passing the yielding strength. It is seen that a significant gap is formed between 24 °C and 190 °C. While the curves with the temperature range of 190 °C to 655 °C are stacked to each other. Five flow relationships are fitted to each temperature range, as shown in Figs. 6a–6c. The Ludwik shows the goodness fit lines with the R^2 (coefficient of determination) value has the closest value to 1. The Ludwik flow relationship is expressed with the following equation:

$$\sigma = \sigma_0 + K_L \varepsilon^{n_L}, \quad (1)$$

where σ_0 is constant stress, K_L is a strain hardening coefficient, and n_L is a strain hardening exponent. The constant material values of the Ludwik equation are presented in the curved line, as shown in Fig. 7. It can be seen that the trend of all material constants shows a similar trend. However, the values of K_L and n_L are decreasing significantly at 655 °C. It has been reported that a decreasing value was caused by the change of slip and dislocation mechanism [4].

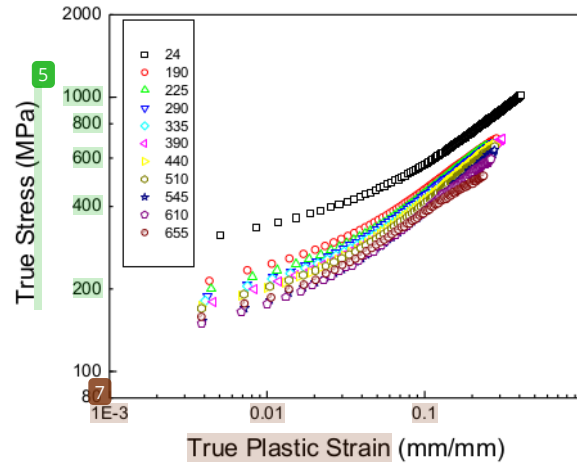


FIGURE 5. True stress-strain curve of 316 L(N) SS

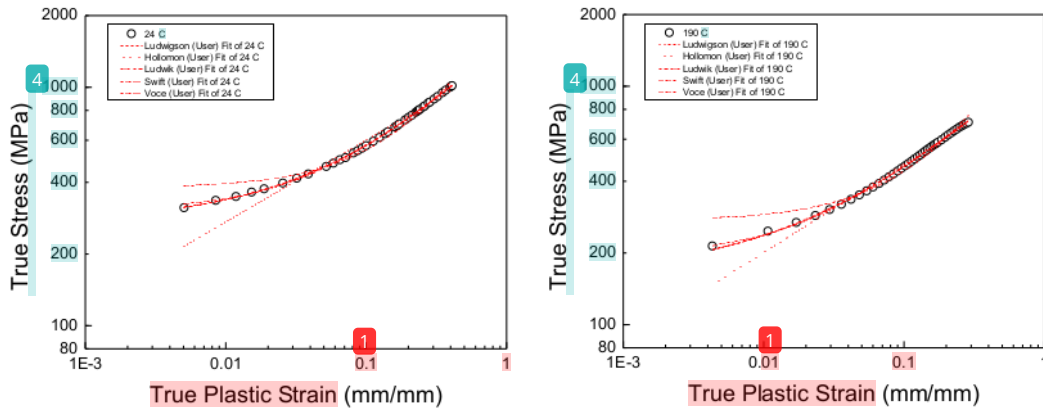


FIGURE 6a. The fitted line of five flow relationships to each temperature condition of true stress-strain curve.

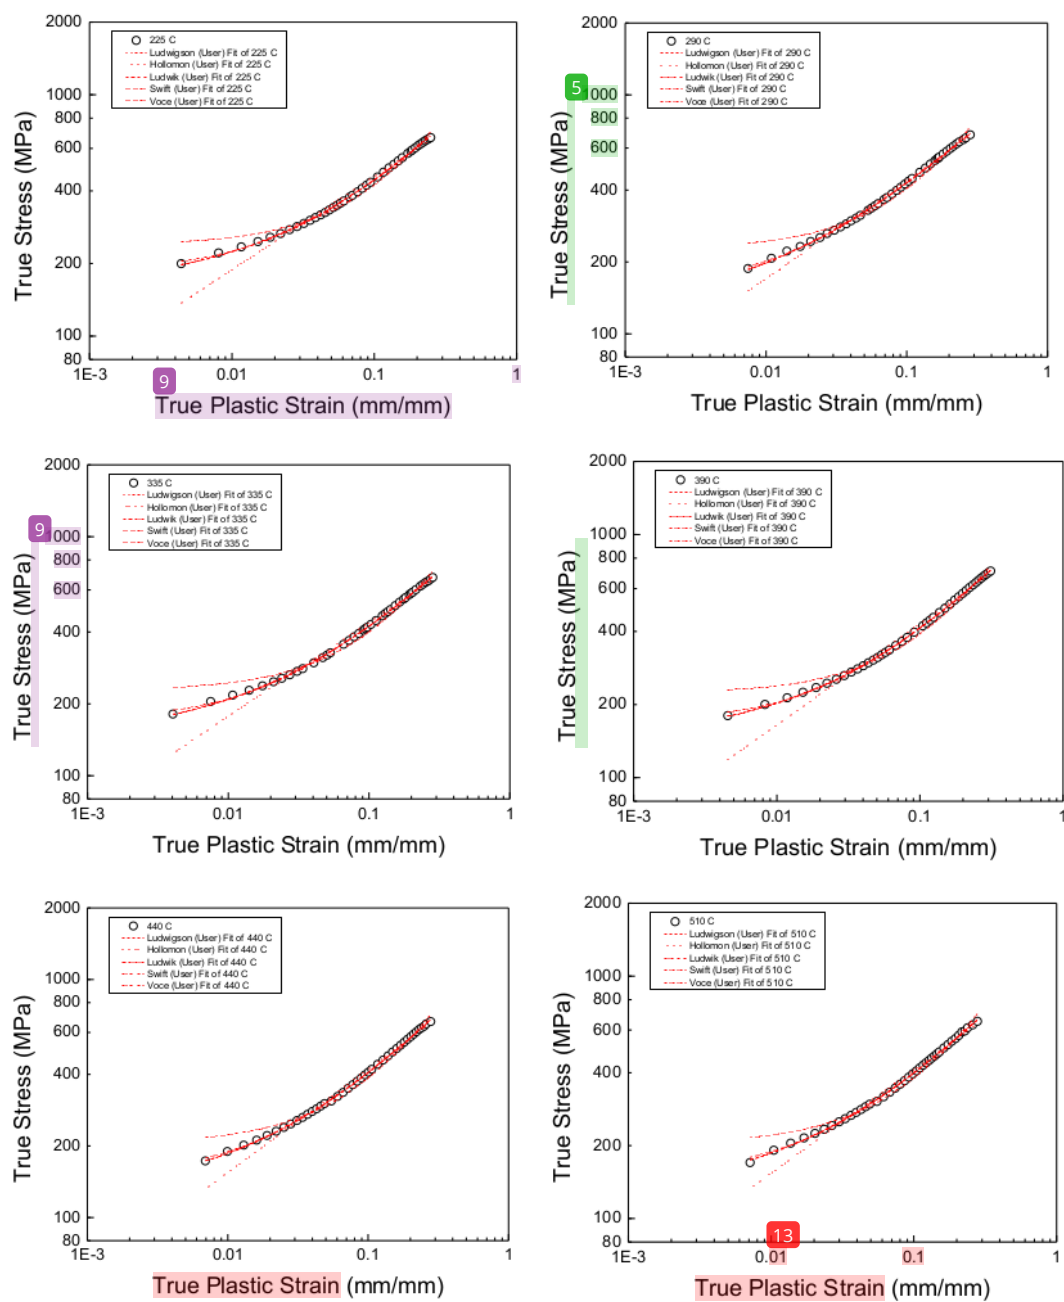


FIGURE 6b. The fitted line of five flow relationships to each temperature condition of true stress-strain curve.

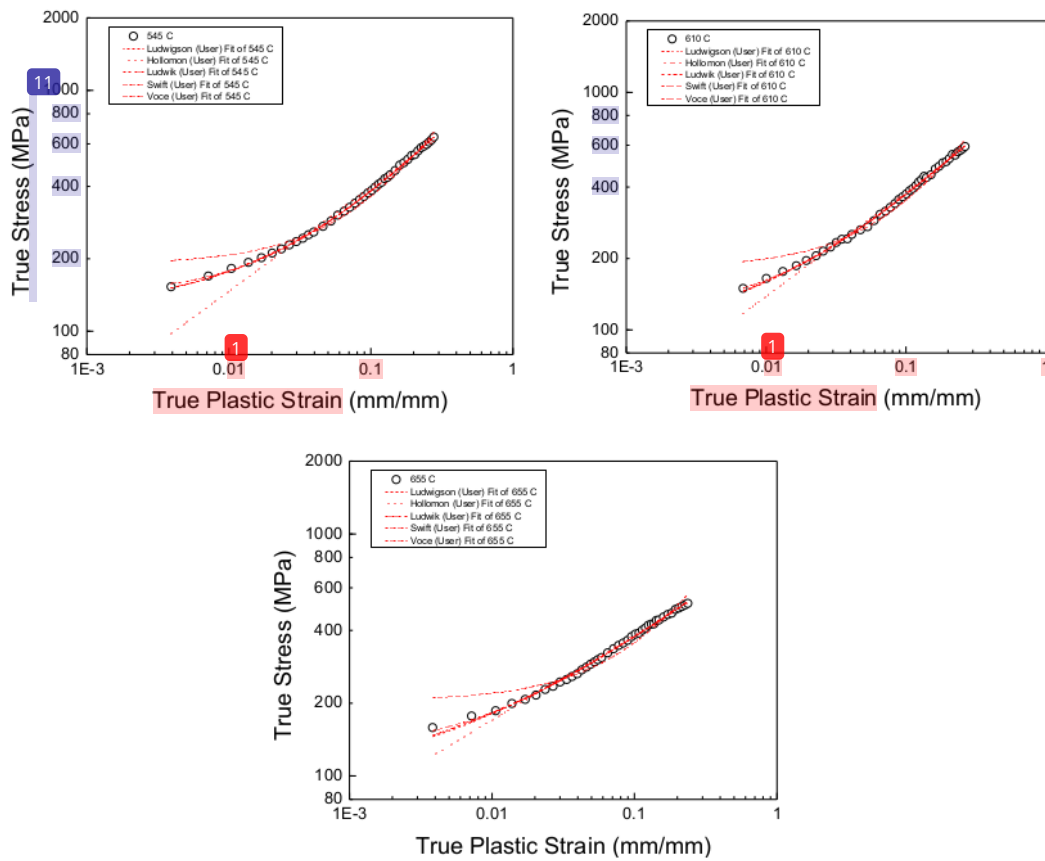


FIGURE 6c. The fitted line of five flow relationships to each temperature condition of true stress-strain curve.

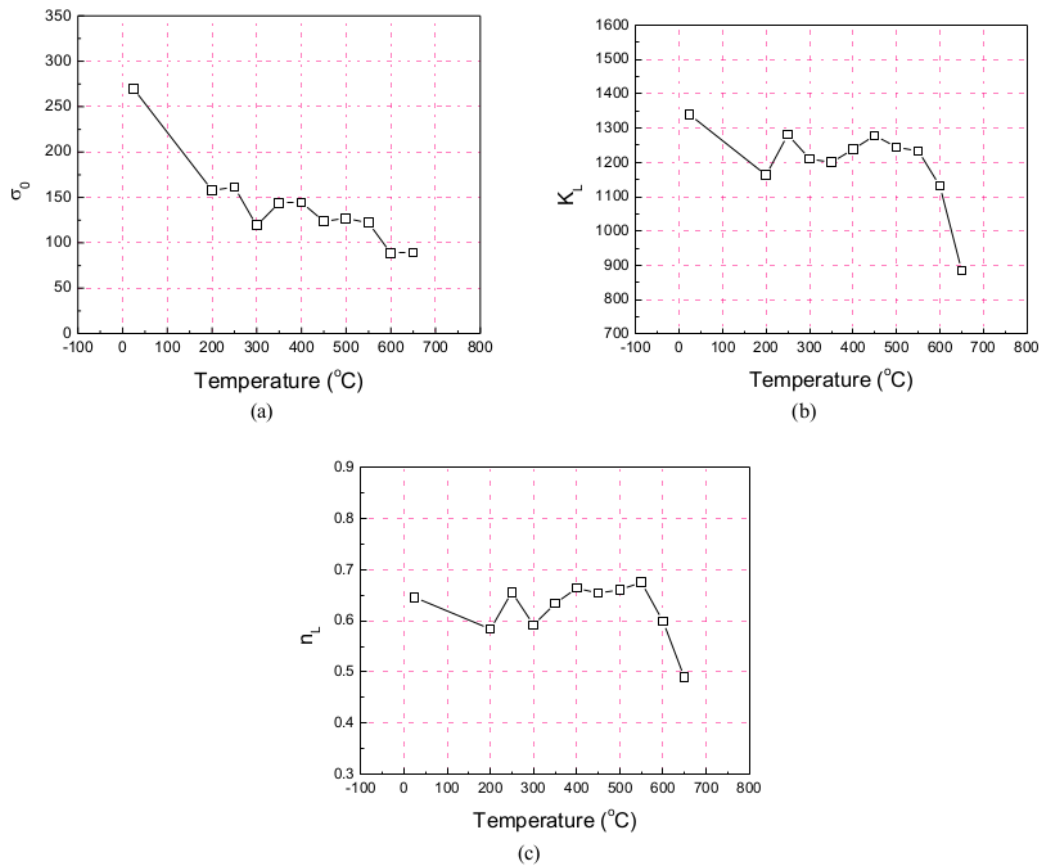


FIGURE 7. Ludwik constant material: (a) constant stress, (b) strain hardening coefficient, and (c) strain hardening exponent.

CONCLUSION

The determination of serrated yielding region became essential to make sure the exact characteristic of 316 L(N) SS prior used. In this preliminary study, the serrated yielding region was determined well by three manifestations curve: ultimate tensile strength, yield strength, and constant material of Ludwik's equation. The serrated yielding began at the temperature of 190 °C. It was also found that there was a change of serrated yielding mechanism at 655 °C. Further investigation is needed to determine the serrated yielding mechanism due to slip and dislocation under various elevated temperatures and deformation rates.

ACKNOWLEDGMENTS

This study was supported and grant funded by LPPM Universitas Sanata Dharma Yogyakarta.

REFERENCES

1. X. Sun, R. Xing, W. Yu, and X. Chen, *Int. J. Solid Struct.* **207**, 196–205 (2020).
2. H. D. Kweon, J. W. Kim, O. Song, and D. Oh, *Nucl. Eng. Technol.* **53**, 647–656 (2021).
3. I. M. W. Ekaputra, W. G. Kim, J. Y. Park, S. J. Kim, and E. S. Kim, *J. Mech. Sci. Technol.* **30**, 3151–3158 (2016).

4. I. M. W. Ekaputra, W. G. Kim, J. Y. Park, S. J. Kim, and E. S. Kim, [Nucl. Eng. Technol.](#) **48**, 1387–1395 (2016).
5. S. Yang, L. Xue, W. Lu, and X. Ling, *J. Alloys Compd.* **815**, 1–8 (2020).
6. P. Rodriguez, [Bull. Mater. Sci.](#) **6**, 653–663 (1984).
7. ASTM E8/E8M-21, *Standard Test Methods for Tension Testing of Metallic Materials*, ASTM International, West Conshohocken, PA (2021).
8. ASTM E21-20, *Standard Test Methods for Elevated Temperature Tension Tests of Metallic Materials*, ASTM International, West Conshohocken, PA (2020).

Tensile behavior of austenitic stainless steel 316LN at high temperatures a preliminary study

ORIGINALITY REPORT

10%

SIMILARITY INDEX

6%

INTERNET SOURCES

8%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

- | | | |
|---|--|----|
| 1 | J Simmons. "Strain hardening and plastic flow properties of nitrogen-alloyed Fe-17Cr-(8-10)Mn-5Ni austenitic stainless steels", Acta Materialia, 1997
Publication | 1% |
| 2 | Infianto Boimau, Kostan D. F. Mataubenu, Dens E. S. I. Asbanu, Tri B. J. Banu. "A simple pendulum studied using Hall effect sensor and Arduino", AIP Publishing, 2022
Publication | 1% |
| 3 | docksci.com
Internet Source | 1% |
| 4 | li.mit.edu
Internet Source | 1% |
| 5 | lucris.lub.lu.se
Internet Source | 1% |
| 6 | journal.unj.ac.id
Internet Source | 1% |

7	Submitted to Jawaharlal Nehru Technological University Student Paper	1 %
8	Zhang, Z.. "Ageing effect on cyclic plasticity of a tempered martensitic steel", International Journal of Fatigue, 200702 Publication	1 %
9	Essam Ahmed, Uwe Reisgen, Markus Schleser, Oleg Mokrov. "Biaxial behavior of laser welded DP/TRIP steel sheets", The International Journal of Advanced Manufacturing Technology, 2013 Publication	1 %
10	patents.google.com Internet Source	1 %
11	mdpi-res.com Internet Source	<1 %
12	pastel.archives-ouvertes.fr Internet Source	<1 %
13	Shinohara, K.. "Shear punch and ball microhardness measurements of 14 MeV neutron irradiation hardening in five metals", Journal of Nuclear Materials, 198508 Publication	<1 %
14	pure.manchester.ac.uk Internet Source	<1 %

15

G. C. Soares, R. R. U. Queiroz, L. A. Santos.
"Effects of Dynamic Strain Aging on Strain
Hardening Behavior, Dislocation Substructure,
and Fracture Morphology in a Ferritic
Stainless Steel", Metallurgical and Materials
Transactions A, 2019

Publication

<1 %

16

Vivek Patel, Avinash Gopalan, Harshit K.
Khandelwal, Nachiket Keskar, Y. Pushpalatha
Devi, R.N. Singh. "Anisotropy and variability in
thermal creep behaviour of Zr-2.5Nb pressure
tube", International Journal of Pressure
Vessels and Piping, 2022

Publication

<1 %

Exclude quotes On

Exclude matches < 5 words

Exclude bibliography On