



INTERNATIONAL JOURNAL OF APPLIED SCIENCES AND SMART TECHNOLOGIES

UNIVERSITAS SANATA DHARMA

P-ISSN : 26558564. < > E-ISSN : 26859432



0.477273
Impact Factor



89
Google Citations



Sinta 4
Current Accreditation

[Google Scholar](#) [Garuda](#) [Website](#) [Editor URL](#)

History Accreditation

2020

2021

2022

2023

2024

Garuda [Google Scholar](#)

Characteristics of Wooden Furniture Drying Machine

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 75-88](#)

2022 [DOI: 10.24071/ijasst.v4i1.4755](#) [Accred : Sinta 4](#)

Cryptocurrencies Advantages and Disadvantages: A Review

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 1-20](#)

2022 [DOI: 10.24071/ijasst.v4i1.4610](#) [Accred : Sinta 4](#)

Shrinkage of Biocomposite Material Specimens [HA/Bioplastic/Serisin] Printed using a 3D Printer using the Taguchi Method

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 89-96](#)

2022 [DOI: 10.24071/ijasst.v4i1.4205](#) [Accred : Sinta 4](#)

Impact of Online Education and Sentiment Analysis from Twitter Data using Topic Modeling Algorithms

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 21-34](#)

2022 [DOI: 10.24071/ijasst.v4i1.4637](#) [Accred : Sinta 4](#)

Comparison of Static Signature Identification using Artificial Neural Networks Based on Haar, Daubechies and Symlets Wavelet Transformations

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 97-108](#)

2022 [DOI: 10.24071/ijasst.v4i1.4786](#) [Accred : Sinta 4](#)

Determining the Coefficient of Restitution Through the Bouncing Ball Experiment using Phyphox

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 35-46](#)

2022 [DOI: 10.24071/ijasst.v4i1.4548](#) [Accred : Sinta 4](#)

The influence of artificial aging on tensile properties of Al 6061-T4

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 109-120](#)

2022 [DOI: 10.24071/ijasst.v4i1.4816](#) [Accred : Sinta 4](#)

Weft Computation of Endek Weaving

Universitas Sanata Dharma [International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 47-58](#)

2022 [DOI: 10.24071/ijasst.v4i1.4666](#) [Accred : Sinta 4](#)

[The Effect of Motor Parameters on the Induction Motor Speed Sensorless Control System using Luenberger Observer](#)

Universitas Sanata Dharma

[International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 01, June 2022 59-74](#)

2022

[DOI: 10.24071/ijasst.v4i1.4518](#)[Accred : Sinta 4](#)[The experiment of wind electric water pumping for salt farmers in remote area of Demak-Indonesia](#)

Universitas Sanata Dharma

[International Journal of Applied Sciences and Smart Technologies Volume 04, Issue 02, December 2022 185-194](#)

2022

[DOI: 10.24071/ijasst.v4i2.5344](#)[Accred : Sinta 4](#)[View more ...](#)

SEARCH

[Journals](#)[Articles](#)

ABOUT

[About DOAJ](#)[DOAJ team](#)[Ambassadors](#)[Advisory Board & Council](#)[Editorial Subcommittee](#)[Volunteers](#)[News](#)

APPLY

[Application form](#)[Guide to applying](#)[The DOAJ Seal](#)[Transparency & best practice](#)[Why index your journal in DOAJ?](#)[Licensing & copyright](#)

DOCUMENTATION

[API](#)[OAI-PMH](#)[Widgets](#)[Public data dump](#)[OpenURL](#)[XML](#)[FAQs](#)

SUPPORT

[Support DOAJ](#)[Publisher supporters](#)[Supporters](#)

STAY UP TO DATE

[!\[\]\(5dca7bfbc13dee28f2892b5a008b91ca_img.jpg\) Twitter](#)[!\[\]\(5c5827840e20b2fdcf5a95912ba29712_img.jpg\) Facebook](#)[!\[\]\(d456fca11939f1728f8c90c83c6e12a3_img.jpg\) Github](#)[!\[\]\(5c9c0083657e3e23e37785bd1c32a518_img.jpg\) Linkedin](#)[!\[\]\(5a18afe524e3f27c8e87b83f91993700_img.jpg\) WeChat](#)[!\[\]\(dd33652849c8e9399cc4230af88d276a_img.jpg\) Atom feed](#)[Feedback](#)



SEARCH MENU

© DOAJ 2023 default by all rights reserved [unless otherwise specified](#).

[Accessibility](#) [Privacy](#) [Contact](#) [T&Cs](#) [Media](#)

IS4OA [Cottage Labs](#)



Content on this site is licensed under a Creative Commons [Attribution-ShareAlike 4.0 International \(CC BY-SA 4.0\)](#) license.



Copyrights and related rights for **article metadata** waived via [CC0 1.0 Universal \(CC0\) Public Domain Dedication](#).

Photos used throughout the site by David Jorre, Jean-Philippe Delberghe, JJ Ying, Luca Bravo, Brandi Redd, & Christian Perner from Unsplash.

Expect on average **8 weeks** from submission to publication.

BEST PRACTICE

This journal began publishing in **open access in 2019**.

This journal uses a **CC BY** license.



→ Look up their [open access statement](#) and their [license terms](#).

The author **retains unrestricted** copyrights and publishing rights.

→ Learn more about their [copyright policy](#).

Permanent article identifier:

- DOI

JOURNAL METADATA

This website uses cookies to ensure you get the best experience. [Learn more about DOAJ's privacy policy.](#)

HIDE THIS MESSAGE



Society or Institution

Fakultas Sains dan Teknologi, Indonesia

Manuscripts accepted in
English

LCC subjects

Science

Technology: Engineering (General). Civil engineering (General).

Keywords

engineering

science

technology

mathematics

physics

chemistry

Feedback

Added 26 April 2022 • Updated 26 April 2022

International Journal of Applied Sciences and Smart Technologies

p-ISSN : 2655 - 85

e-ISSN : 2685 - 94

HOME ABOUT LOGIN REGISTER SEARCH CURRENT ARCHIVES
ANNOUNCEMENTS

Home > **Volume 04, Issue 02, December 2022**

International Journal of Applied Sciences and Smart Technologies

International Journal of Applied Sciences and Smart Technologies (IJASST) is published by Faculty of Science and Technology, Sanata Dharma University Yogyakarta-Central Java-Indonesia. IJASST is an open-access peer reviewed journal that mediates the dissemination of academicians, researchers, and practitioners in engineering, science, technology, and basic sciences which relate to technology including applied mathematics, physics, and chemistry. IJASST accepts submission from all over the world, especially from Indonesia

Announcements

National Accreditation for IJASST

[IJASST has been nationally accredited by the Ministry of Research and Technology/National Research and Innovation Agency of the Republic of Indonesia \(Volume 2 No 1 2020 - Volume 6 No 2 2024\) and indexed in SINTA 4.](#)

[Decree No. 204/E/KPT/2022 on October 03rd, 2022](#)



Posted: 2023-01-02

[More Announcements...](#)

Volume 04, Issue 02, December 2022

Full Issue

View or download the full issue

[PDF](#)

Table of Contents

Articles

[Sugarcane Production Modeling Using Machine Learning in Western Maharashtra](#)
Chhaya Gunaji Narvekar, Madhuri Rao

[PDF](#)
123-130

[A White Noise Approach to Occupation Times of Brownian Motion](#)
Herry Pribawanto Suryawan

[PDF](#)
131-140



[OPEN JOURNAL SYSTEMS](#)

[Journal Help](#)

USER

Username

Password

☐ Remember me

[Login](#)

NOTIFICATIONS

- [View](#)
- [Subscribe](#)

LANGUAGE

Select Language

English

[Submit](#)

JOURNAL CONTENT

Search

Search Scope

All

[Search](#)

Browse

- [By Issue](#)
- [By Author](#)
- [By Title](#)
- [Other Journals](#)

FONT SIZE

INFORMATION

- [For Readers](#)
- [For Authors](#)
- [For Librarians](#)



Article
Template

International Journal of Applied Sciences and Smart Technologies

p-ISSN : 2655 - 8564
e-ISSN : 2685 - 9432

[HOME](#) [ABOUT](#) [LOGIN](#) [REGISTER](#) [SEARCH](#) [CURRENT](#) [ARCHIVES](#) [ANNOUNCEMENTS](#)

[Home](#) > [About the Journal](#) > **Editorial Team**

Editorial Team

Editor In Chief

[Dr. Eng. I Made Wicaksana Ekaputra](#), Sanata Dharma University, Yogyakarta, Indonesia

Associate Editor

[Prof. Dr. Sudi Mungkasi](#), Sanata Dharma University, Indonesia
[Dr. Yohanes Baptista Lukivanto](#), Sanata Dharma University, Yogyakarta, Indonesia
[Dr. Ir. Iswanjonjo](#), Sanata Dharma University, Yogyakarta, Indonesia
[Dr. Mahardhika Pratama](#), Nanyang Technological University, Singapore
[Dr. Mukesh Jewariya](#), National Physical Laboratory, New Delhi, India
[Dr. Apichate Maneewong](#), Thailand Institute of Nuclear Technology, Bangkok, Thailand
[Dr. Augustinus Bayu Primawan](#), Sanata Dharma University, Yogyakarta, Indonesia
[Dr. Pham Nhu Viet Ha](#), Vietnam Atomic Energy Institute, Hanoi, Viet Nam
[Dr. Mongkolserj Lin](#), Institute of Technology of Cambodia, Phnom Penh, Cambodia
[Dr. Monica Cahyaning Ratri](#), Sanata Dharma University, Indonesia
[Prof. Dr. Leo Hari Wiryanto](#), Bandung Institute of Technology, Bandung, Indonesia
[Dr. Pranowo](#), Atma Jaya Yogyakarta University, Yogyakarta, Indonesia

Editorial Proofreader

[Paulina Heruningsih Prima Rosa, M.Sc.](#), Sanata Dharma University, Yogyakarta, Indonesia
[Ir. Ignatius Aris Dwiarmoko, M.Sc.](#), Sanata Dharma University, Yogyakarta, Indonesia

Editorial Assistant

[Rosalia Arum Kumalasanti, M.T.](#), Sanata Dharma University, Indonesia
[Vittalis Ayu, M.Cs.](#), Sanata Dharma University, Yogyakarta, Indonesia
[Eduardus Hardika Sandy Atmaja, M.Cs.](#), Sanata Dharma University, Yogyakarta, Indonesia

Administrator and Circulation

[Catharina Maria Sri Wijayanti, S.Pd.](#), Sanata Dharma University, Yogyakarta, Indonesia

Publisher : [Fakultas sains dan Teknologi](#)

Society/Institution : [Universitas Sanata Dharma](#)



This work is licensed under a [Creative Commons Attribution 4.0 International License](#).



[OPEN JOURNAL SYSTEMS](#)

[Journal Help](#)

USER

Username
 Password
☐ Remember me
[Login](#)

NOTIFICATIONS

- [View](#)
- [Subscribe](#)

LANGUAGE

Select Language
 English

JOURNAL CONTENT

Search

Search Scope

All

Browse

- [By Issue](#)
- [By Author](#)
- [By Title](#)
- [Other Journals](#)

FONT SIZE

INFORMATION

- [For Readers](#)
- [For Authors](#)
- [For Librarians](#)



International Journal of Applied Sciences and Smart Technologies

p-ISSN : 2655 - 8564

e-ISSN : 2685 - 9432

[HOME](#) [ABOUT](#) [LOGIN](#) [REGISTER](#) [SEARCH](#) [CURRENT](#) [ARCHIVES](#) [ANNOUNCEMENTS](#)[Home](#) > **Volume 04, Issue 02, December 2022**

International Journal of Applied Sciences and Smart Technologies

International Journal of Applied Sciences and Smart Technologies (IJASST) is published by Faculty of Science and Technology, Sanata Dharma University Yogyakarta-Central Java-Indonesia. IJASST is an open-access peer reviewed journal that mediates the dissemination of academicians, researchers, and practitioners in engineering, science, technology, and basic sciences which relate to technology including applied mathematics, physics, and chemistry. IJASST accepts submission from all over the world, especially from Indonesia

Announcements

National Accreditation for IJASST

IJASST has been nationally accredited by the Ministry of Research and Technology/National Research and Innovation Agency of the Republic of Indonesia (**Volume 2 No 1 2020 - Volume 6 No 2 2024**) and indexed in **SINTA 4**.

[Decree No. 204/E/KPT/2022 on October 03rd, 2022](#)



Posted: 2023-01-02

[More Announcements...](#)

Volume 04, Issue 02, December 2022

Full Issue

View or download the full issue

[PDF](#)

Table of Contents

Articles

[Sugarcane Production Modeling Using Machine Learning in Western Maharashtra](#)

Chhaya Gunaji Narvekar, Madhuri Rao

[PDF](#)
123-130

[A White Noise Approach to Occupation Times of Brownian Motion](#)

Herry Pribawanto Suryawan

[PDF](#)
131-140

[Dijkstra Algorithm Implementation in Determining the Shortest Route of Industrial Gas Distribution in PT Tira Austenite Tbk Cikarang with Python Programming Language](#)

Bernadetha Nathalia Fitra Soverenty, Cyrenia Novella Krisnamurti

[PDF](#)
141-148

[An Enhanced Multi-Level Authentication Electronic Voting System](#)

Ayodeji Olusegun Ibitoye, Halleluyah O. Aworinde, Esther T. Adekunle

[PDF](#)
149-158

[Appropriate Technology-Based Project-Based Learning: 3D Printing Utilization for Learning Media Class](#)

Monica Cahyaning Ratri

[PDF](#)
159-172

[Employee Presence Using Body Temperature Detection And Face Recognition](#)

Arif Ainur Rafiq, Erna Alimudin, Della Puspa Rani

[PDF](#)
173-184

[The experiment of wind electric water pumping for salt farmers in remote area of Demak-Indonesia](#)

S. Dio Zevalukito, Yohanes Baptista Lukiyanto, F. Risky Prayogo

[PDF](#)
185-194

[Response Surface Modelling of the Mechanical Properties of Oil Palm Empty Fruit Bunch Fibre Reinforced Polyester Composites](#)

Chinwe Evangeline Kamma

[PDF](#)
195-220

[Comparative Study of Master Oil \(MO\) and Lophira lanceolata \(Ochnaceae\) Oil \(LLO\) Lubricants in Sewing Machines](#)

Jamu Benson Yerima, G. O. Mokoro, D. William, S. D. Najoji

[PDF](#)
221-232

[Design of Someone's Character Identification Based on Handwriting Patterns Using Support Vector Machine](#)

Rosalia Arum Kumalasanti

[PDF](#)
233-240

[Optimization of Vacuum Forming Parameter Settings to Minimize Burning Defect on Strawberry Packaging Products Using the Taguchi Method](#)

Th. Adi Nugroho, Adhi Setya Hutama, Perwita Kurniawan

[PDF](#)
241-254

[The Effect of the Number of Cooling Pads on the Output Air Condition and Effectiveness of Air Cooler](#)

Wibowo Kusbandono

[PDF](#)
255-266

[Pre-service Science Teachers' Competence and Confidence in Scientific Inquiry](#)

R Rohandi

[PDF](#)
267-280[OPEN JOURNAL SYSTEMS](#)[Journal Help](#)

USER

Username

Password

☐ Remember me

[Login](#)

NOTIFICATIONS

- [View](#)
- [Subscribe](#)

LANGUAGE

Select Language

English

JOURNAL CONTENT

Search

Search Scope

All

Browse

- [By Issue](#)
- [By Author](#)
- [By Title](#)
- [Other Journals](#)

FONT SIZE

INFORMATION

- [For Readers](#)
- [For Authors](#)
- [For Librarians](#)



LaTeX
Template



The Effect of the Number of Cooling Pads on the Output Air Condition and Effectiveness of Air Cooler

Wibowo Kusbandono^{1,*}

¹*Department of Mechanical Engineering, Faculty of Science and Technology, Sanata Dharma University, Indonesia*

**Corresponding Author: bowo@usd.ac.id*

(Received 01-11-2022; Revised 18-11-2022; Accepted 21-11-2022)

Abstract

To get comfortable air, it can be done by using an air conditioner or air cooler. The electrical power used for the air cooler is relatively lower. This research aims to see the effect of the number of cooling pads on the output air condition and on the effectiveness of the air cooler. The research was conducted experimentally. The research was conducted by varying the number of cooling pads used, thick. The distance between the cooling pads is 1.5 cm. The air temperature inlet of the air cooler has a dry bulb air temperature of 30°C with an air humidity (RH) of 60%. The lowest dry bulb air temperature achieved was $24,04^{\circ}\text{C}$ when the number of cooling pads was 6 pieces. The highest air cooler effectiveness achieved was 0.99. Research has given satisfactory results. However, research can be developed by varying the cooling pad material or cooling pad pattern in order to obtain a small number of cooling pads.

Keywords: air cooler, effectiveness, cooling pad



1 Introduction

Air cooler is equipment used to produce cool air. Unlike the air conditioner (AC) which uses the working fluid of Freon, the air cooler uses the working fluid of water. Therefore the air cooler is more environmentally friendly. In its operation, the AC engine uses a steam compression cycle to produce cold air, while the air cooler uses an evaporative cooling process to get cold air. In the AC engine, the freon circulation system is in a closed flow system, while in the air cooler, the water flow system is open. In an open flow system, the fluid makes contact with the outside air. The use of the air cooler does not require it to be placed in a closed room, so that the air cooler can be placed in a room with free air circulation. Thus the need for oxygen from the air for users is not lacking. Of course, the air flow in the room is conditioned relatively calmly, it doesn't interfere with the air flow from the air cooler. From the psychrometric chart, it can be seen that for the condition of the air entering the air cooler at a dry bulb air temperature of 35⁰C with a relative humidity (RH) of about 46%, the lowest dry bulb air cooler outlet air temperature that can be achieved is around 25⁰C. Meanwhile, if the incoming air is with dry bulb air temperature of about 30⁰C with a RH of about 60%, the lowest dry-bulb output air temperature can be reached 24⁰C.

The air cooler is not used to condition all the air in the room. The air output of the air cooler is intended for users only. The output air flow is only directed to people who want to enjoy the air from the air cooler. With the air cooler, the output dry bulb air temperature can reach 24⁰C- 26⁰C. At that air temperature, the user can feel the coolness of the air it produces. In the design of the air cooler, in addition to the condition of the output air being in a comfortable area, it must also have high effectiveness. Unlike the AC machine, if the AC machine is designed to produce dry air [1], the air cooler is designed to produce relatively higher air humidity. The higher the RH, the cooler the air produced.

The manufacture of air coolers has actually been done for a long time. It has even been patented a lot [2-8]. But in Indonesia, the new air cooler is known after the air cooler was marketed in the last decade. Besides being cheap, the air cooler can also be carried anywhere (can be moved around). It's just that the condition of the output air produced by the air cooler depends on the condition of the air entering the air cooler [9]. The

minimum dry bulb output air temperature that the air cooler can produce is equal to the wet bulb air temperature entering the air cooler. When the dry bulb air temperature output reaches the temperature of the wet bulb air entering the air cooler, the relative humidity of the air reaches 100%. Because the RH of the air has reached 100%, it is impossible for water evaporation to occur on the cooling pad which causes a decrease in air temperature again. Unlike AC machines, the air cooler cannot produce the desired air condition. For areas in Indonesia, air coolers are suitable for use in air conditions, with dry bulb ambient air temperatures between 28⁰C to 35⁰C with low relative humidity (40%-50%). The lower the relative humidity of the air, the more profitable it is because the lowest air temperature produced will be lower.

Research on air cooler has been carried out by several researchers. The difference between the research that has been carried out by the author and that carried out by previous researchers lies in the shape of the cooling pad, cooling pad material, air cooler geometry and research variations. There are studies that vary the intake air temperature [10], there are studies that are carried out by varying the thickness of the cooling pad [11]. Some use a cooling pad made of sponge [11], some use coconut fiber [12,15]. Some vary the flow of air produced by a fan [12]. There are also those that vary the temperature of the water used [13, 14] and there are those that vary the water discharge [15]. In the research that has been done by the author, the cooling pad used is relatively thin, about 1 mm, and with different materials from previous researchers. The research was conducted by varying the number of cooling-pads. In the market, the cooling pad used for the air cooler is quite thick, with a thickness of more than 5 mm, some even more than 4 cm.

Some of the assumptions used in this research that have been carried out are: (1) when the air passes through the cooling pad, the air undergoes an evaporative cooling process (2) when the air undergoes an evaporative cooling process, the wet bulb air temperature remains (starting when the air enters the water). cooler until the air comes out of the air cooler) (3) the evaporative cooling process runs at a constant enthalpy, no energy enters and leaves. In the evaporative cooling process, there is a decrease in dry bulb air temperature, an increase in relative humidity, an increase in specific humidity, and an increase in dew point temperature.

2 Research Methodology

The research was conducted experimentally. The object under study is a homemade air cooler. Figure 1, presents a schematic of the air cooler used in the study. Figure 2, presents an image of the cooling pad. The maximum number of cooling pads used is 6 pieces. The thickness of the cooling pad moistened with water is 1 mm.

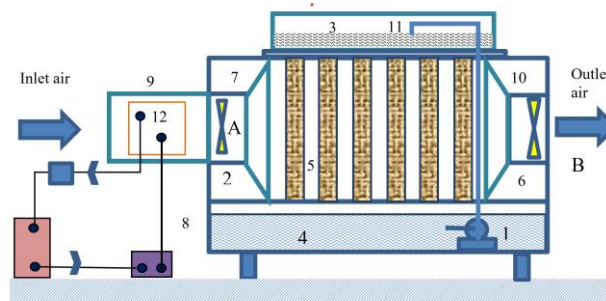


Figure 1. Schematic of an air cooler with 6 cooling pads

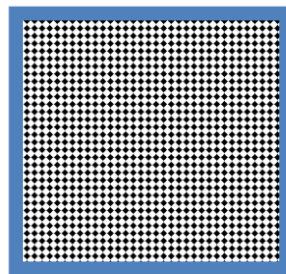
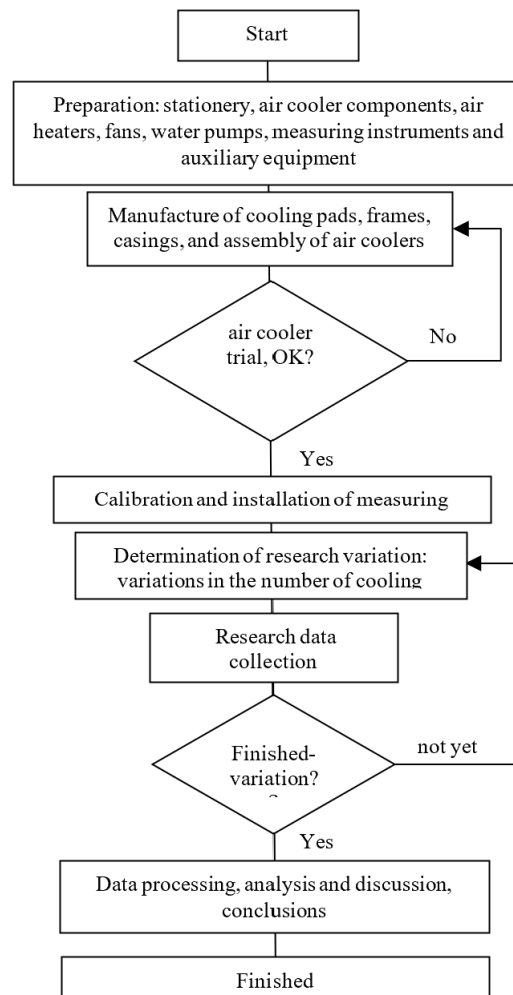


Figure 2. Cooling Pads

Air-cooler components in Figure 1

- | | |
|--|-----------------------|
| 1. Submersible pump (submersible pump) | 7. Water cooler frame |
| 2. Air intake fan | 8. Case |
| 3. Upper water reservoir | 9. Air inlet |
| 4. Bottom water reservoir | 10. Air outlet |
| 5. Cooling pad | 11. Water channel |
| 6. Bottom water reservoir | 12. Air heater |

**Figure 3.** Research Flow

In this study, the air entering the air cooler was conditioned at a dry bulb air temperature of 30⁰C, with a relative humidity of 60%. If the dry bulb air temperature does not reach 30⁰C the air is preheated by the air heater before entering the air cooler, as desired. The air flow velocity is 1.5 m/s. The research implementation follows the research flow as presented in Figure 3. The research was conducted by varying the number of cooling pads, using 3 cooling pads, 4 cooling pads, 5 cooling pads and 6 cooling pads. To determine the air condition, a dry bulb thermometer and a wet bulb thermometer were used. Meanwhile, to measure the velocity of air flow used anemometer. Other air conditions can be searched by using psychrometric charts, such as relative humidity, absolute humidity, specific volume and air enthalpy.

The data from the research results are used to get the effectiveness of the air cooler. The effectiveness of the air cooler (ϵ) is the ratio between the actual (actual) decrease in dry bulb air temperature and the possible or ideal decrease in dry bulb air temperature [9]. The equation used to calculate the effectiveness of the air cooler is expressed by Equation (1).

$$\epsilon = \frac{(T_{db,A} - T_{db,B})}{(T_{db,A} - T_{db,C})} \dots (1)$$

In Equation (1)

ϵ : air-cooler effectiveness

$T_{db,A}$: dry bulb air temperature entering air-cooler, $^{\circ}\text{C}$

$T_{db,B}$: dry bulb air temperature out of air-cooler, $^{\circ}\text{C}$.

$T_{db,C}$: lowest achievable dry bulb air temperature air-cooler, $^{\circ}\text{C}$.

$T_{db,D}$: wet bulb air temperature in process evaporative-cooling, $^{\circ}\text{C}$

3 Results and Discussions

The results of the study are presented in Table 1. It appears that the condition of the output air from the air cooler is influenced by the number of cooling pads used. For air coolers with 6 cooling pads, the air cooler output air conditions produce the lowest dry bulb air temperature. As for the air cooler with 3 cooling pads, the air condition of the air cooler output produces the highest dry bulb air temperature. This is probably due to the large surface area of the water in contact with the air passing through the cooling pad. The more the number of cooling pads on the air cooler, the more surface area of the water in contact with the air when the water flows through the cooling pad. The larger the surface area of the water in contact with the air, the more water can evaporate into the air. Unlike the boiling process, the evaporation process can take place not at the boiling point temperature. The evaporation process can take place at any temperature. As long as the humidity has not reached 100% RH, the water flowing on the cooling pad can still evaporate into the air. The process of evaporation of water requires heat. In the process of evaporation of water in the cooling pad, heat is taken from the environment. In this case the environment is air. The heat is taken from the air flowing through the cooling

pad. The more water that evaporates, the greater the heat of vaporization required to change the water from the liquid phase to the vapor phase. The greater the heat taken by water from the air, the lower the air temperature. The amount of heat taken from the air is equal to the amount of heat used to change the liquid phase from the water to the water vapor phase. During the evaporative cooling process, the enthalpy value of the air remains constant. The heat taken from the air is sensible heat, while the heat used to change water from the liquid phase to the vapor is latent heat. In this case, it is assumed that no heat is taken from the water used to change the phase from water to steam.

Table 1. Conditions of air inlet and outlet of air cooler and effectiveness of air cooler

Number of cooling pad	Intake air condition <i>air cooler</i>				Air condition out of <i>air cooler</i>			Effectiveness of <i>air cooler</i> (ϵ)
	$T_{db,A}$ (°C)	$T_{wb,A}$ (°C)	RH_A (%)	W_A (gr/kg)	$T_{db,B}$ (°C)	$T_{wb,B}$ (°C)	W_B (gr/kg)	
3	30°C	24°C	60%	16,1	25,15 °C	24°C	18,1 9	0,81
4	30°C	24°C	60%	16,1	24,77 °C	24°C	18,3 5	0,87
5	30°C	24°C	60%	16,1	24,38 °C	24°C	18,5 2	0,94
6	30°C	24°C	60%	16,1	24,04° C	24°C	18,6 6	0,99

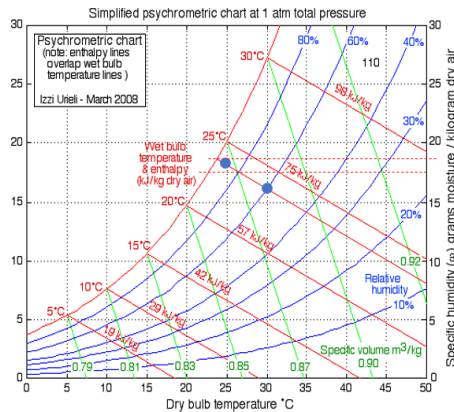


Figure a. Air cooler with 3 cooling pads

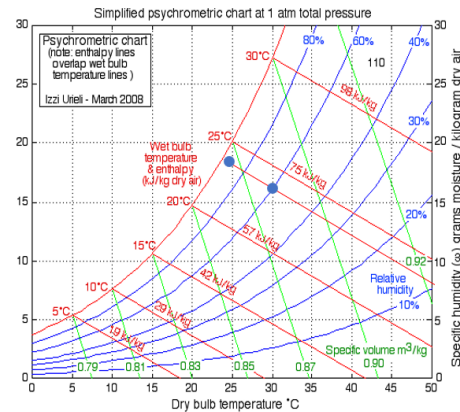


Figure b. Air cooler with 4 cooling pads

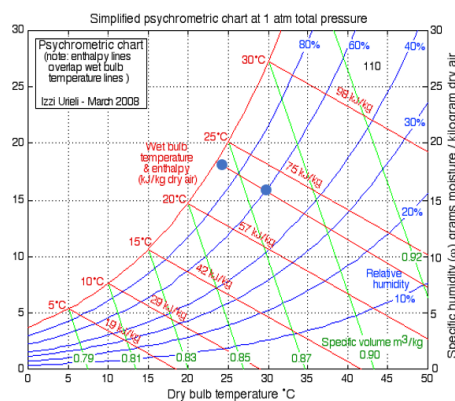


Figure c. Air cooler with 5 cooling pads

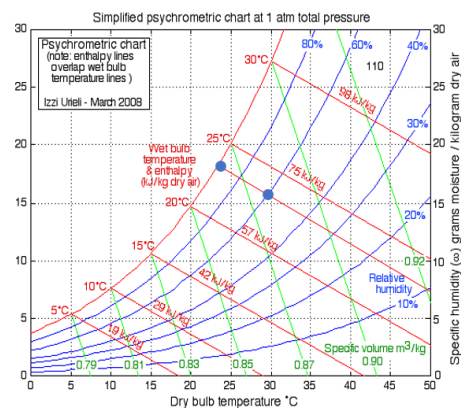


Figure d. Air cooler with 6 cooling pads

Figure 4. Conditions of air inlet and outlet of air cooler and effectiveness of air cooler with different number of pads. a. Air cooler with 3 cooling pads. b. Air cooler with 4 cooling pads. c. Air cooler with 5 cooling pads. d. Air cooler with 6 cooling pads

To get a cooler dry bulb air temperature from the air cooler, it can be done by increasing the use of cooling pads. The more the cooling pad is used, the lower the output dry bulb air temperature will be. But of course the number of cooling pads used has a limit. The limitation is, if the use of n number of cooling pads can produce output air with a relative humidity (RH) of 100%, then the addition of a cooling pad is no longer needed. The addition of a cooling pad will no longer reduce the dry bulb air temperature from the air cooler, because it is no longer possible to change the phase from water to steam anymore. In other words, the amount of water that evaporates is equal to the amount of water that

condenses. On the other hand, the more cooling pads used, the lower the output airflow rate. This is because the more the cooling pad is used, the greater the air resistance that occurs. Seeing the results of this study, the use of 6 cooling pads is sufficient. Because the relative humidity value of the resulting air is close to 100%. It is no longer necessary to add a cooling pad. Even if one additional cooling pad is added, the minimum output dry ball air that can be achieved is only 24 °C. Not so influential.

From Table 1 and Figure 4a-d, it appears that the lowest dry bulb air temperature that the air cooler can achieve is 24,04 °C. The air cooler is able to reduce the dry bulb air temperature by about 5,96°C, from the initial temperature of 30°C. Close to the decrease in the maximum dry bulb air temperature that the air cooler can achieve, by 6°C (with air intake conditions of 30 °C and 60% RH). For air humidity, the greater the number of cooling pads, the greater the specific humidity value (ω) produced. The specific humidity of the air increased from 16.1 grams of water/kg dry air to a maximum of 18.66 grams of water/kg dry air. This is because the water content in the air increases from the evaporation of water passing through the cooling pad. Likewise, the value of the relative humidity of the air (RH), increased from the original 60% to all above 90%. The highest produced by the air cooler, the air output of the air cooler has a RH of almost 100%.

The effectiveness of the air cooler depends on the number of cooling pads used. In this study, the effectiveness of the air cooler from the lowest value to the highest value, for the air cooler with a total of 3 cooling pads, 4 cooling pads, 5 cooling pads and 6 cooling pads, respectively, was 0.81; 0.87; 0.94; 0.99. This is understandable because the effectiveness value depends on the dry bulb air temperature from the air cooler outlet. The lower the dry bulb air temperature, the higher the effectiveness value (Equation (1)). Due to the difference in temperature between the dry bulb air temperature entering the air cooler and the dry bulb air temperature, the air cooler output is getting bigger. The effectiveness of the air cooler is directly proportional to the difference between the dry bulb air temperature inlet and the output. As is known, the difference between the lowest dry bulb air temperature that can be achieved by the air cooler (the temperature at which the air has a 100% RH) and the dry bulb air temperature entering the air cooler remains constant. From the results of this study, research can be developed with the target of producing outdoor air conditions that have a relative humidity of 100% of the air but with

a number of cooling pads that are smaller than 6 cooling pads. It can be done by using another cooling pad, it can be with a different cooling pad material or with a different cooling pad pattern.

4 Conclusions

The study resulted in conclusions (a) for air coolers with 3, 4, 5, 6 cooling pads, respectively producing dry bulb air temperatures of: 25,15⁰C; 24,77⁰C; 24,38⁰C and 24,04⁰C. (b) for air coolers with 3, 4, 5, 6 cooling pads, respectively, the effectiveness of the air cooler is 0.81; 0.87; 0.94 and 0.99. Research can be developed by minimizing the number of cooling pads, for example by using a cooling pad material or a different cooling pad pattern.

Acknowledgements

The author would like to thank the University of Sanata Dharma which has provided financial support, so that this research can be completed.

References

- [1] W. Arismunandar, S. Heizo, “Penyegaran Udara Edisi ke 4”, Pradnya Paramita. Jakarta. 1991.
- [2] J. K. Jain, D.A. Hindoliya, “Experimental performance of new evaporative cooling pad material”, Mechanical Engineering Department, Ujjain Polytechnic College, Ujjain (M.P.) 456010, India, 2011.
- [3] Charles W. Albrecht, Evanston, Wyo, “Evaporative Air Cooler”, United State Patent, Patent Number 4,953,831, Date of Patent: Sep. 4, 1990.
- [4] James A. Brock, Alexander, Ark, “Portable Evaporative Air Cooler”, United State Patent, Patent Number Des. 337,817, Date of Patent: Jul. 27, 1993
- [5] Peter Sydney Wright, Blackwood, Australia, “Off-Road Evaporative Air Cooler”, United State Patent, Patent Number, Des. 433,111, Date of Patent: Oct. 31, 2000
- [6] William R. Calton, Scofield Dr., Cupertino, “Evaporative Cooling”, United State Patent, Patent Number 5,715,698, Date of Patent: Feb. 10, 1998.
- [7] United State Patent, Patent Number 5,168,722, Date of Patent: Dec. 8, 1992

- [8] James A. Brock, Alexander, Ark, “Portable Evaporative Air Cooler”, United State Patent, Patent Number Des. 337,817, Date of Patent: Jul. 27, 1993.A
- [9] R.S. Khurmi, J.K. Gupta, “A Text Book of Refrigeration and Air Conditioning”, Eurasia Publishing House (P) Ltd, Ram Nagar, New Delhi-110055. 1995.
- [10] Doddy Purwadianto, Petrus Kanisius Purwadi, “Hubungan Kondisi Udara Masuk dengan Kondisi Udara Keluaran Air Cooler”, *Jurnal Ilmiah Widya Teknik*, **20**(2), 2021.
- [11] I Nyoman Suryana, I Nengah Suarnadwipa, Hendra Wijaksana, “Studi Eksperimental Performansi Pendingin Evaporative Portable dengan Pad Berbahan Spon Dengan Ketebalan Berbeda”, *Jurnal Ilmiah Teknik Desain Mekanika*, **1**(1), September 2014.
- [12] Ekadewi A. Handoyo, Fandi Dwiputra Suprianto, Selrianus, “Penggunaan Serabut Kelapa Sebagai Bantalan pada Evaporative Cooler”, *Seminar Nasional Teknik Mesin 3*, 30 April 2008, Surabaya, Indonesia, 2008.
- [13] Toni Dwi Putra, Nurida Finahari, “Pengaruh Perubahan Temperatur Media Pendingin pada Direct Evaporative Cooler”, *Proton: Jurnal Ilmu – Ilmu Teknik Mesin*, **3**(1), 2011.
- [14] Hendra Listiono, Azridjal Aziz, Rahmat Iman Mainil, “Analisis Evaporative Air Cooler dengan Temperatur Media Pendingin yang Berbeda”, *Jurnal Online Mahasiswa Fakultas Teknik*. **2**(2). 2015.
- [15] M.D. Amri, B. Yunianto, “Pengaruh Debit Aliran Air terhadap Efektifitas Direct Evaporative Cooling dilengkapi Cooling Pad Serabut Kelapa”, *Jurnal Teknik Mesin S-1*, **2**(2), 2014.

This page intentionally left blank